



WOW

FLOOR TILES

perfect floors for unique spaces



CHEVRON FLOOR
Ice White Matt, Ash grey Matt & Graphite Matt

06

Introduction / introducción

08

Hexa Floor
20X23 cm

18

Trapezium Floor
10X23 cm

30

Chevron Floor
10X52 cm

42

Technical Features

three models

infinity solutions

we have designed three different models that can be combined with each other, which allow to create endless compositions, ensuring the exclusiveness of each space. Endless layout solutions "Create your own one".


Hemos diseñado tres modelos diferentes combinables entre sí, los cuales permiten crear composiciones infinitas, asegurando la exclusividad de cada espacio. Infinitas combinaciones "Crea la tuya".






TRAPEZIUM FLOOR
4"x9" / 10x23 cm



HEXA FLOOR
8"x9" / 20x23 cm



CHEVRON FLOOR
4"x20,5" / 10x52 cm

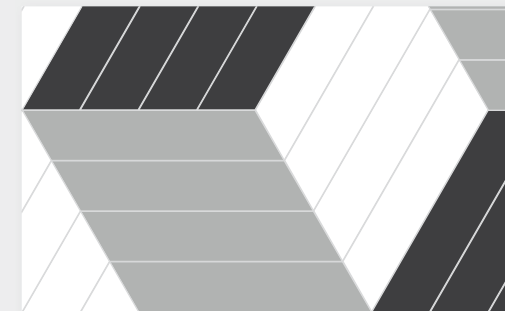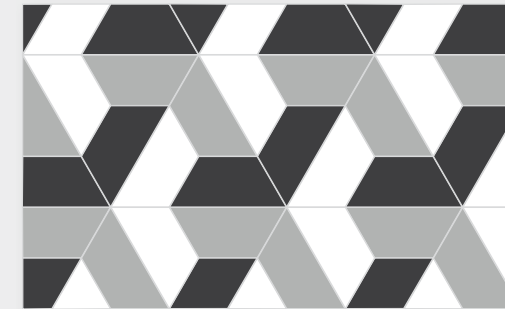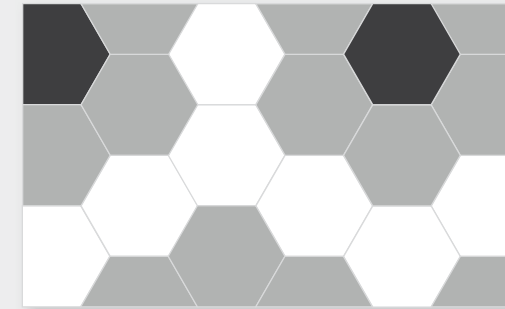

COLOUR COMBINATIONS
combinaciones de color



UNLIMITED COMPOSITIONS
composiciones infinitas



MIXED FORMATS
combinación de formatos

HEXA FLOOR

8"X9" / 20X23 cm




Available colours / Colores disponibles



ICE WHITE MATT



ASH GREY MATT



GRAPHITE MATT



HEXA FLOOR
Ice White Matt
Ash grey Matt
Graphite Matt


COMPOSITION
composición



ICE WHITE MATT
33,3%



ASH GREY MATT
33,3%




GRAPHITE MATT
33,3%

HEXA FLOOR
Ice White Matt
Ash Grey Matt
Graphite Matt



COMPOSITION
composición



GRAPHITE MATT
100%

WALL TILE
composición



MOON by WOW
ICE WHITE MATT
100%

HEXA FLOOR
Graphite Matt
MOON by WOW
Ice White Matt

COMPOSITION
composición



ASH GREY MATT
100%




COMPOSITION
composición




ICE WHITE MATT
100%

TRAPEZIUM FLOOR

4"X9" / 10X23 cm

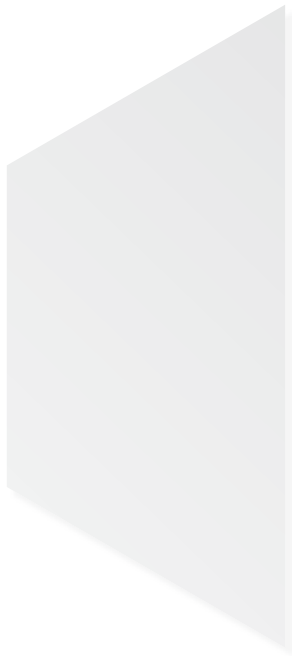

Available colours / Colores disponibles



ICE WHITE MATT



ASH GREY MATT




GRAPHITE MATT



TRAPEZIUM FLOOR
Ice White Matt
Ash Grey Matt
Graphite Matt


COMPOSITION
composición



ICE WHITE MATT
100%



COMPOSITION
composición



ICE WHITE MATT
40%



ASH GREY MATT
26,6%




GRAPHITE MATT
33,3%

TRAPEZIUM FLOOR
· Ice White Matt
· Ash Grey Matt
· Graphite Matt



TRAPEZIUM FLOOR
Ice White Matt
ARCH by WOW
Graphite Matt

COMPOSITION
composición



ICE WHITE MATT
100%

WALL TILE
composición




ARCH by WOW
GRAPHITE MATT
100%



TRAPEZIUM FLOOR
· Ice White Matt
· Ash Grey Matt
· Graphite Matt

COMPOSITION
composición



ICE WHITE MATT
42%



ASH GREY MATT
29%



GRAPHITE MATT
29%


WALL TILE
composición



HEXA by WOW
ICE WHITE MATT
100%



COMPOSITION
composición



ICE WHITE MATT
70%



ASH GREY MATT
15%



GRAPHITE MATT
15%

TRAPEZIUM FLOOR

- . Ice White Matt
- . Ash Grey Matt
- . Graphite Matt

CHEVRON FLOOR

4"X20,5" / 10X52 cm



Available colours / Colores disponibles




WOW

CHEVRON FLOOR
Ice White Matt
Ash Grey Matt
Graphite Matt



CHEVRON FLOOR
Graphite Matt
WAVE by WOW
Ice White Matt

COMPOSITION
composición

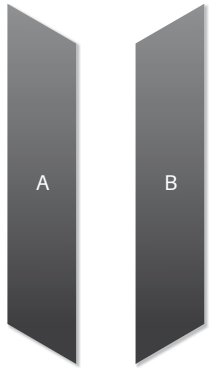

50% 50%
GRAPHITE MATT

WALL TILE
composición




WAVE by WOW
ICE WHITE MATT
100%



HEXA FLOOR
Ice White Matt
CHEVRON FLOOR
Ice White Matt

COMPOSITION
composición

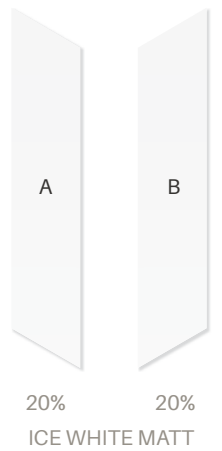




CHEVRON FLOOR
· Ice White Matt
· Ash Grey Matt
· Graphite Matt


COMPOSITION
composición



16,65%
16,65%
ICE WHITE MATT

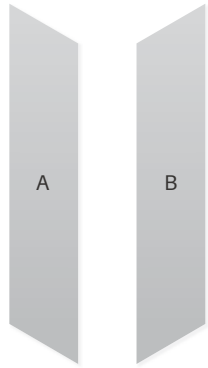


16,65%
16,65%
ASH GREY MATT

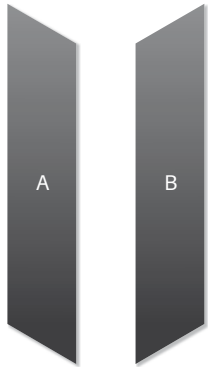

16,65%
16,65%
GRAPHITE MATT

COMPOSITION
composición

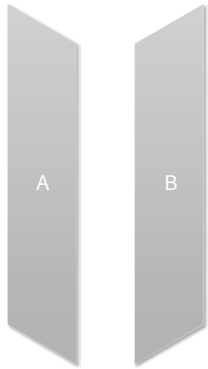

50% 50%
ASH GREY MATT

WALL TILE
composición



MOON L by WOW
ICE WHITE MATT
35%



MOON by WOW
ICE WHITE MATT
65%


COMPOSITION
composición




25% 25%
ICE WHITE MATT



ICE WHITE MATT
15%



ASH GREY MATT
15%



GRAPHITE MATT
20%

CHEVRON FLOOR
. Ice White Matt
HEXA FLOOR
. Ice White Matt
. Ash Grey Matt
. Graphite Matt

FLOOR TILES, TECHNICAL FEATURES / INFORMACIÓN TÉCNICA

TECHNICAL FEATURES FOR DRY-PRESSED CERAMIC TILES WITH WATER ABSORPTION B Ia (≤ 0,1%) CARACTERÍSTICAS TÉCNICAS PARA LAS BALDOSAS CERÁMICAS PRENSADAS EN SECO CON ABSORCIÓN DE AGUA B Ia(≤ 0,1%)					
FEATURES / CARACTERÍSTICAS		SPECIFICATION / ESPECIFICACIÓN		NORMA	
	Dimensional Features.	Hexa Floor Trapezium Floor Chevron Floor	(W 200 +/- 0,6 mm x 230 +/- 0,6 mm x h. 8 +/- 0,6 mm) GL (W 98 +/- 0,6 mm x 227 +/- 0,6 mm x h. 8 +/- 0,6 mm) GL (W 98 +/- 0,6 mm x 522 +/- 0,6 mm x h. 8 +/- 0,6 mm) GL	UNE-EN ISO 10545-2:1998	
	Water absorption.		≤ 0,1%	UNE-EN ISO 10545-3:1997	
	Modulus of rupture and breaking strength.		>1300 N >35 N/mm2	UNE-EN ISO 10545-4:2012	
	Crazing resistance.		Pass	UNE-EN ISO 10545-11:1997	
	Household products resistance.		GA	UNE-EN ISO 10545-13:1998	
	Chemical resistance.		GLA	UNE-EN ISO 10545-13:1998	
	Stain resistance.		>3	UNE-EN ISO 10545-14:1998	
	Frost resistance.		Pass	UNE-EN ISO 10545-12:1997	
	Non-slip value.		R10 / CLASS 3 DCOF 0,68	DIN 51130:2014 ANSI A137.1:2012	

FLOOR TILES, PACKING / ENCAJADO

						
Modelo / Formato Model / Format	Piezas / Caja Pieces / Box	m2 / Caja	sq ft / Box	Kg / Caja	Lb/ box	Cajas / Palet Boxes / Pallet
HEXA FLOOR	10	0,350 m²	3,767 sq ft	6,970 kg	15 23/64 lb	120
TRAPEZIUM FLOOR	20	0,334 m²	3,595 sq ft	6,930 kg	15 9/32 lb	120
CHEVRON FLOOR	10	0,456 m²	4,908 sq ft	8,520 kg	18 25/32 lb	112

FLOOR TILES, RECOMMENDATIONS / RECOMENDACIONES

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure procelain earthenware floor tiles adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

All types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems. We recommend a minimum installation joint of 2 mm (0 5/64 in).

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially for ceramic floor tiles, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes. To check that the chosen cleaning product will not damage the paving, we recommend previously testing an area that is hidden or not easily seen, or testing a tile that has not been fitted.

As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

ALMACENAMIENTO

Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado para baldosas de gres porcelánico y adecuados al ambiente al que vayan a estar sometidos. La colocación con morteros tradicionales no garantiza una buena adhesión.

Deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiendo ser el origen de diversas patologías. Se recomienda una junta de colocación de 2 mm.


MANTENIMIENTO Y LIMPIEZA

Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos. Para verificar que el limpiador escogido no dañará al pavimento se requiere hacer una prueba previa en una zona oculta o poco visible o en una baldosa sin instalar.


Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.

FLOOR TILES, DIMENSIONAL FEATURES / PLANIMETRÍA


Hexa Floor

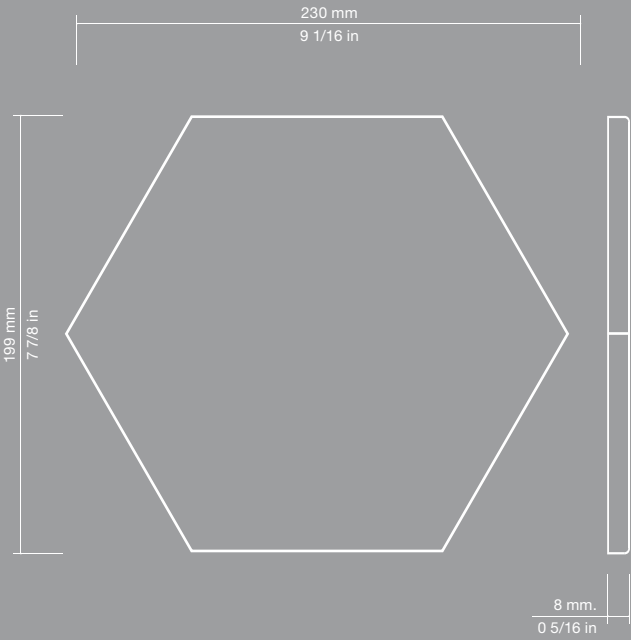


Trapezium Floor

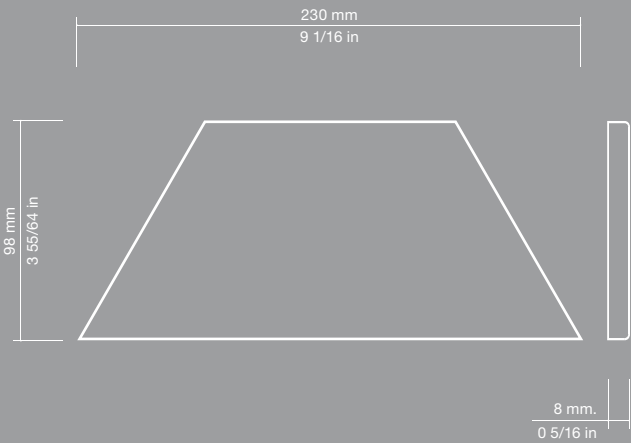

Chevron Floor

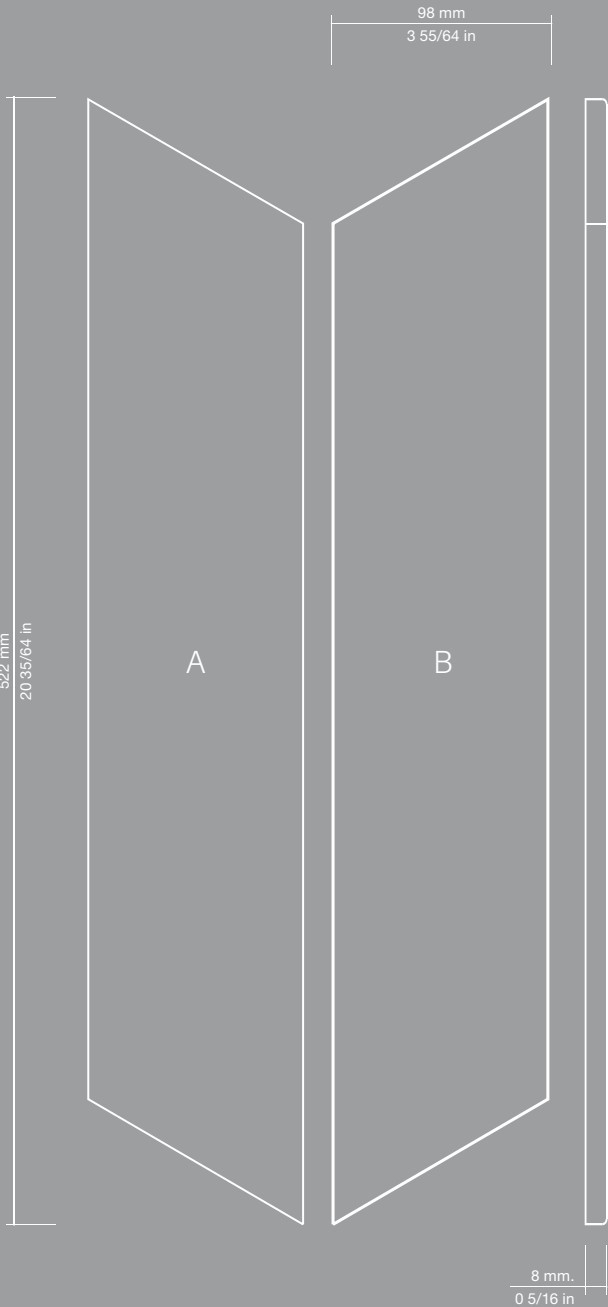

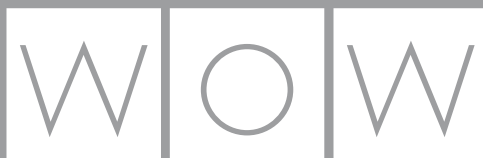

Polígono Pont, Avda. de España 114
12180 Cabanes,
Castellón (Spain)
t. +34 964 331 910 / f. +34 964 331 911

wowdesigneu.com

info@wowdesigneu.com
comercial@wowdesigneu.com
design@wowdesigneu.com

